



BUCK POLE FENCE


Poles and bucks to be peeled or stripped on 3 sides, be round and free of knots. Top of poles to be 3"Ø min., braces to be 4"Ø min., and buck sticks to be 6"Ø min. Buck sticks to be mortised to provide tight joint.

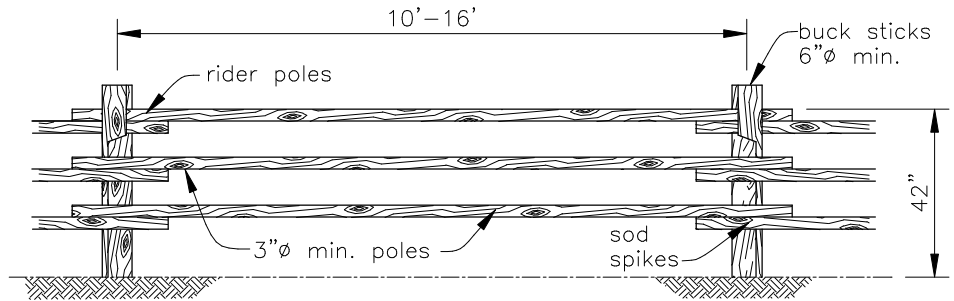

ELEVATION SHOWING POLES AND BUCKS

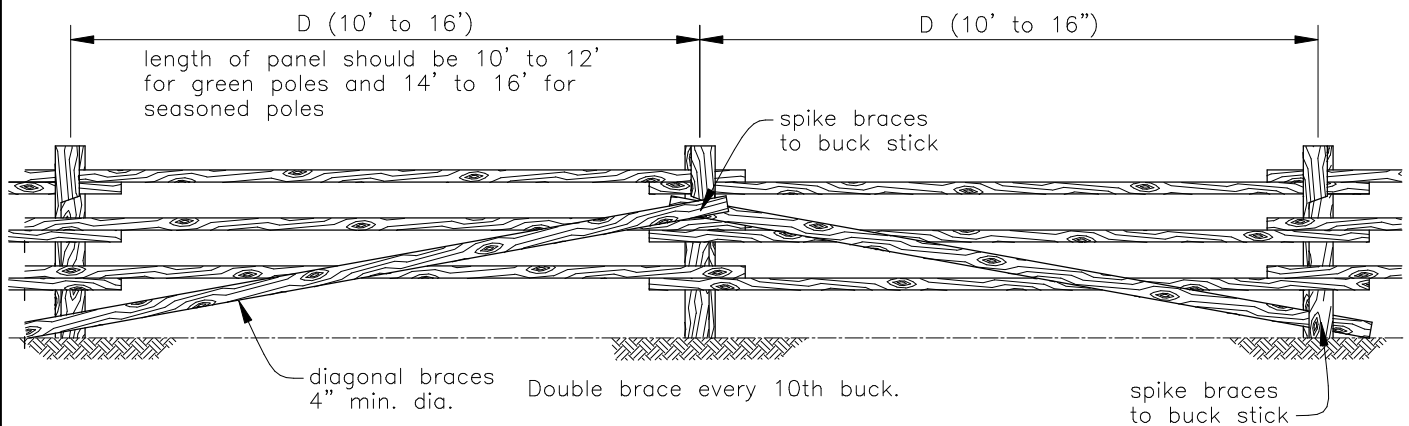

ELEVATION SHOWING DIAGONAL BRACING

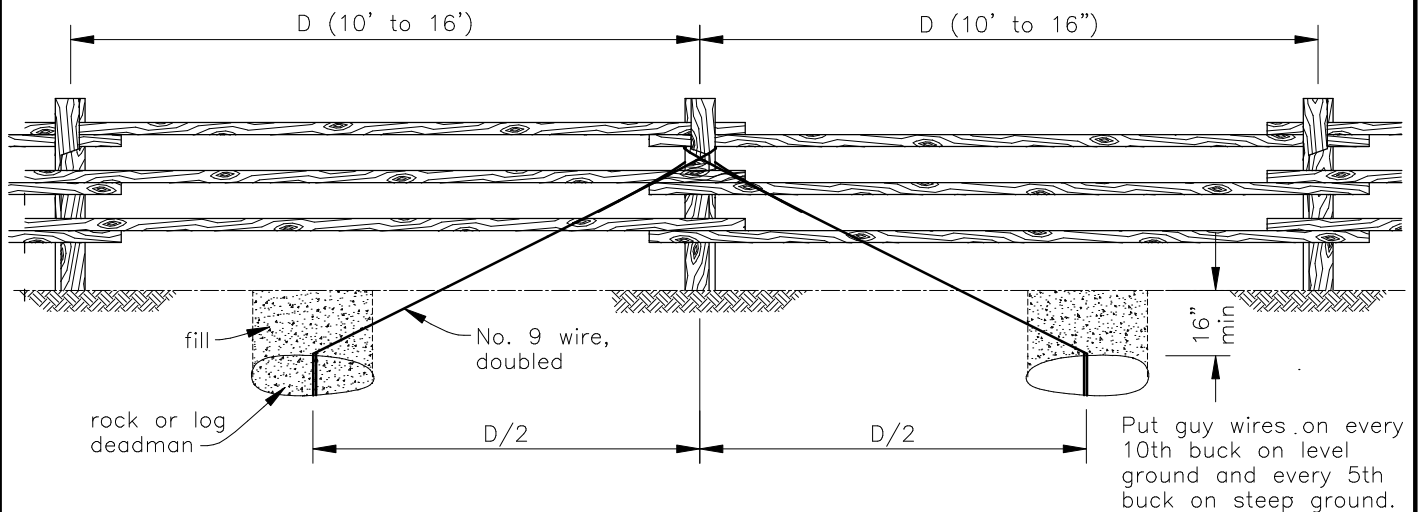

ELEVATION SHOWING GUY WIRE BRACING

Drawing not to scale. Standardized drawing must be adapted to the specific site.

U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE	JOB CLASS	Date
	CAD FILE NO. LSK-0273.DWG	Designed _____
	SHEET OF	Drawn _____
		Checked _____
		Approved _____